

# PS-6508-PPC

High Performance 15" Panel PC



- All In-One Panel PC
- Ultra Slim Design
- 15" Touch Screen
- Intel Celeron® M High Performance Platform
- VESA 100 Wall Mounting Standard
- Optional MSR or MSR & Smart Card Reader Combo


The Protech PS-6508 Panel PC provides the ultimate in stylish slimline touch computing.

Suitable for a range of applications from retail to hospitality, the PS-6508 features a large 15 inch touch screen and powerful processing power all in a slimline stylish case.

With an Intel Celeron® M 1.5GHz processor and 1GB memory, you will have the power to run point of sale software at speed. With a host of ports for connecting peripherals and an optional CF card reader slot and MSR, the PS-6508 offers a complete touch terminal solution.

Wall or pole mountable via the VESA 100 wall mount, the PS-6508 is a versatile touch terminal solution with the ability to use it as a kiosk, POS terminal or digital signage solution.


For a stylish, powerful, all-in-one touch terminal consider the Protech PS-6508TTPOS.

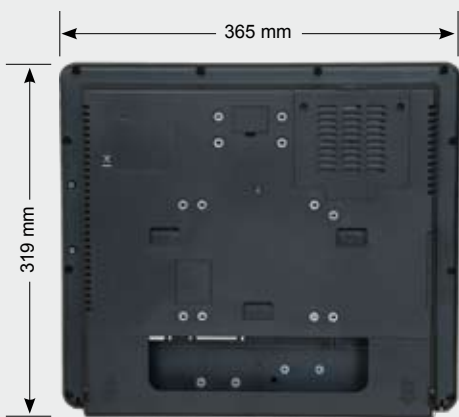

Wall or Pole Mountable

Multiple Connectivity Options

Ultra Slim Design

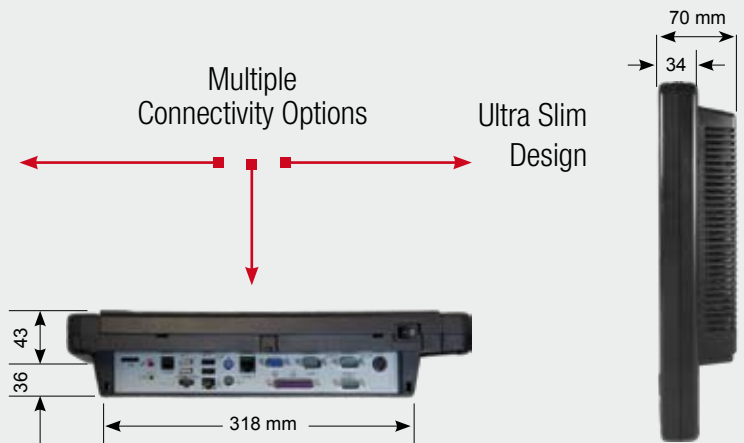

# PS-6508-PPC

High Performance 15" Panel PC

APPLICATIONS: • Hospitality • Retail • Information Kiosk • Digital Signage

## Specifications:

System	CPU Support	Intel Celeron® M 1.5GHz CPU
	Memory	1 x DDR2 SO-DIMM Slot, 1GB DDR2 SO-DIMM
	Core Logic	Intel® 910GMLE & ICH6M
	Network	10/100Base-T Fast Ethernet
	Audio	AC '97 Codec With Internal Mono Speaker (2 watt x 1)
	Power Supply	120W Power Adapter
	System Weight	5.5 kg
	Dimension (W x H x D)	365 x 318.5 x 70 mm (14.37" x 12.54" x 2.76")
	O.S. Support	Windows XP / XPE, Linux, WEPOS
	Mounting Type	VESA 100 standard
Storage	HDD	1 x 2.5" 40GB SATA HDD
	CF	1 x Bootable Compact Flash Slot For CF Type I/II Storage (optional)
I/O Ports	USB	4 x USB 2.0 Port
	Serial Port	3 x DB-9 (COM1&2&3), 1 x RJ45 (COM4), +5/12V Selectable
	Parallel Port	1 x Parallel Port (SPP / EPP / ECP)
	Keyboard & Mouse	2 x PS/2 Port
	Cash Drawer	1 x RJ11 Port For 12V/24V Cash Drawer
	LAN	1 x 10 / 100 Mbps
	VGA	1 x DB-15 VGA Interface
	Audio	1x Line-out, 1x Mic-in Audio Jack
Display	LCD	15" TFT LCD
	Max. resolution	1024 x 768
	Brightness	250 cd/m <sup>2</sup>
	Touch Screen	5-wire ELO Resistive
	Viewing Angle	0 ~ 60 Degree
Environment	EMC & Safety	CE, FCC, C-Tick
	Operating Temp.	0°~35°C(32°~95°F)
	Storage Temp.	-20°~60°C(-4°~140°F)
	Humidity	20~90%
Accessories (Optional)	Scanner	Omni Directional Barcode Scanner
	MSR	JIS-I or II, ISO Track 1+2+3
	MSR + Smart Card Reader	MSR With Smart Card Reader Combo
	I Button	On Face

All company and/or product names are trademark and/or registered trademarks of their respective owners. All features and specifications described in this brochure are subject to change without notice.

## Distributed by

**TOSHIBA TEC AUSTRALIA PTY. LTD.**

Your TOSHIBA TEC Dealer:

Sydney - NSW, Head Office  
Unit 1, 9-11 South Street  
Rydalmere NSW 2116

Melbourne - VIC, Branch Office  
411 Ferntree Gully Road  
Mt. Waverly VIC 3149

Telephone: +61 2 8845 6222  
Facsimilie: +61 2 9680 0892

Telephone: +61 3 8541 7980/1  
Facsimilie: +61 3 8541 7989

Email: sales@toshibatec.com.au